

CE IP 20

2252

Suspended Linear Light

TECHNICAL DATA

Mounting: Surface / Suspended

Body: Aluminium

Colour: White/Black/Aluminium

Protection: IP20

Operation temperature: 0 ~+35

ELECTRICAL DATA

Power:

Type of Equipment: ED

Power factor: 0.90<

OPTICAL DATA

Way of lighting: Direct


Diffuser: Poly carbonate

CCT: 3000K, 4000K, 5000K

CRI: 80<

GENERAL DATA

Application : Offices, Residential, Shops, Hospitals

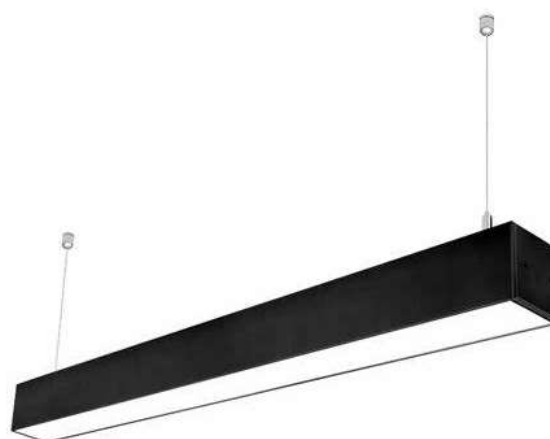

Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature range
2252.1030.0301	ED	30	80	80	2400	0 ~+35
2252.2030.0301	ED	30	80	80	2400	0 ~+35
2252.2060.0701	ED	54	80	80	4320	0 ~+35
2252.2060.0601	ED	60	80	80	4800	0 ~+35

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.


Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS

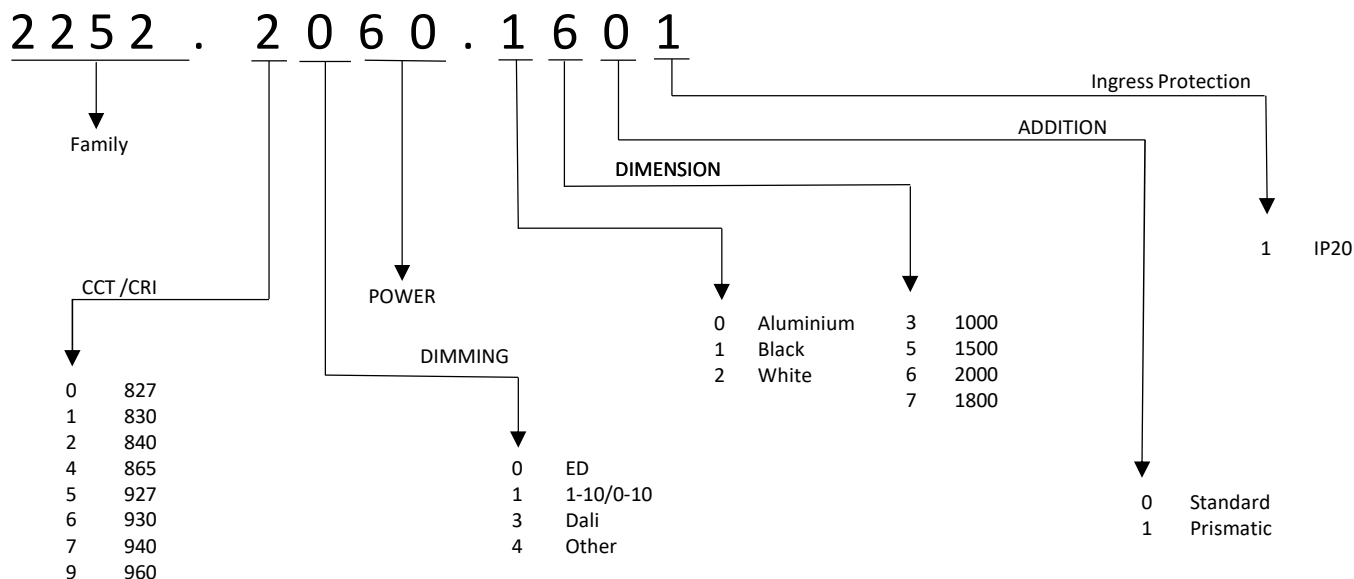

Code	Dimension		
2252.1030.0301	L 1000	W 50	H 75
2252.2030.0301	L 1000	W 50	H 75
2252.2060.0701	L 1800	W 50	H 75
2252.2060.0601	L 2000	W 50	H 75

Note: Length can be customized

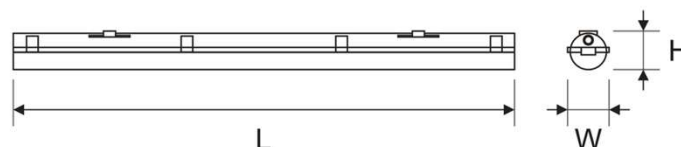

Note: We offer customized lengths on request

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.