

CE IP 65 IK 08

## 7510 Pole Light

### TECHNICAL DATA

**Mounting:** Ground mounted  
**Body:** Die-cast aluminum top cover, aluminum extruded column  
**Colour:** Black, other RAL colour on request  
**Protection:** IP65  
**Operation temperature:** -25 ~ +50

### ELECTRICAL DATA

**Power:** 50W  
**Type of Equipment:** ED, Dimmable on request  
**Power factor:** 0.90<

### OPTICAL DATA

**Beam Angle:**  
**Way of lighting:**  
**Diffuser:** Tempered Glass  
**CCT:** 2700K - 5700K  
**CRI:** 70<

### GENERAL DATA

**Application :** Parks, Gardens, Pathway, Shopping malls etc..



Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
7510.XX50.XX04	ED	50	70	45	2250	-25 ~ +50
7510.XX50.XX14	ED	50	70	45	2250	-25 ~ +50

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.

## ORDER DETAILS

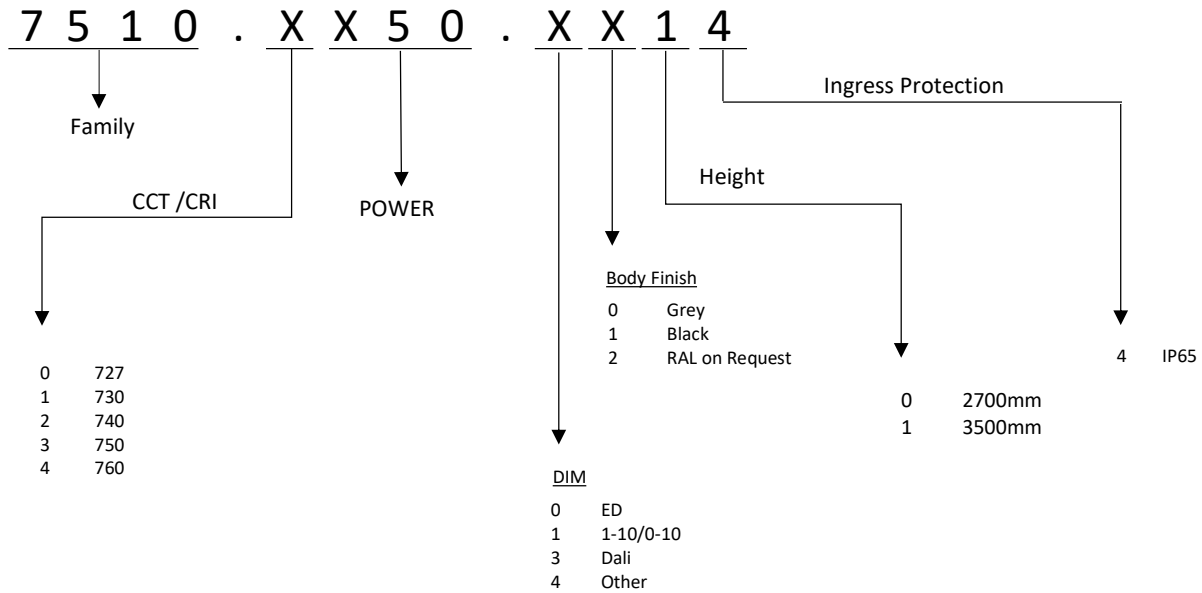

Code	Dimension (mm)
7510.XX50.XX04	D 168 X H 2700
7510.XX50.XX14	D 168 X H 3500

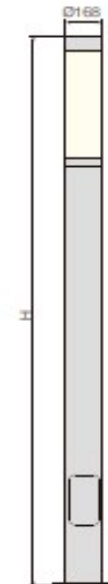

## PHOTOMETRIC DISTRIBUTIONS

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.