

CE IP 66 IK 08

7506

Pole Top light fixtures

TECHNICAL DATA

Mounting: Pole Mounted
Body: Pressure Diecast Aluminium
Colour: Black, other RAL colour on request
Protection: IP66
Operation temperature: -25 ~ +50

ELECTRICAL DATA

Power: 40W / 60W / 80W
Type of Equipment: ED, Dimmable on request
Power factor: 0.90<

OPTICAL DATA

Beam Angle:
Way of lighting: Direct
Diffuser: PC
CCT: 2700K - 5700K
CRI: 70<

GENERAL DATA

Application : Parks, Gardens, Pathway, Shopping malls etc..



Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
7506.XX40.XXX4	ED	40	70	125	5000	-25 ~ +50
7506.XX60.XXX4	ED	60	70	125	7500	-25 ~ +50
7506.XX80.XXX4	ED	80	70	125	10000	-25 ~ +50

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS

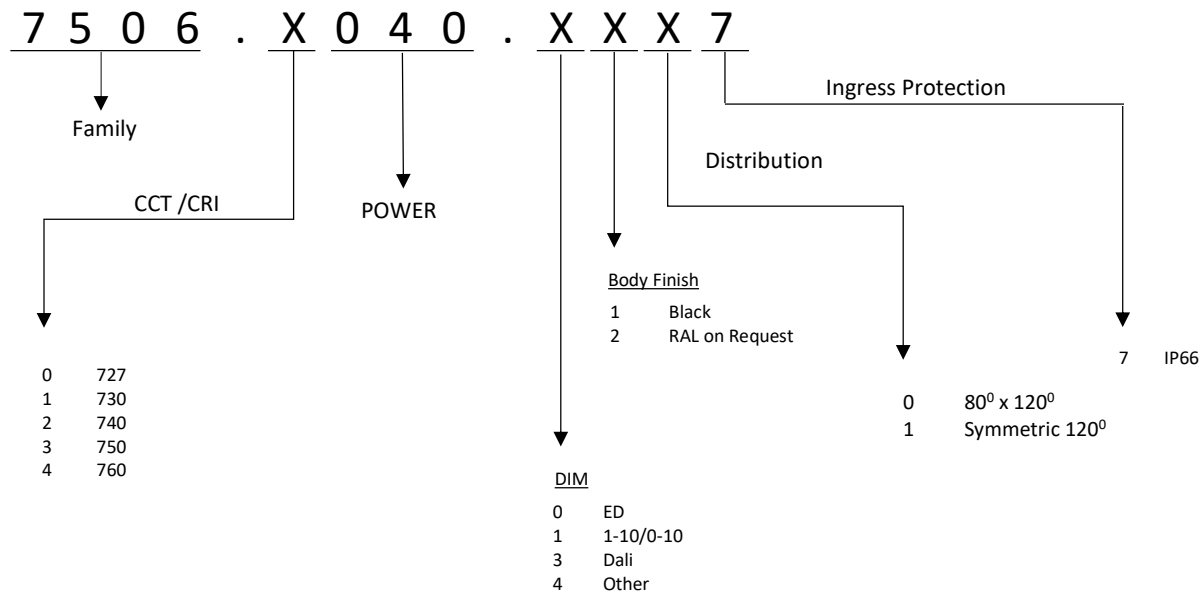

Code	Dimension (mm)	Mounting Dia (mm)
7506.XX40.XXX4	D 482 X H 618	60
7506.XX60.XXX4	D 482 X H 618	60
7506.XX80.XXX4	D 482 X H 618	60

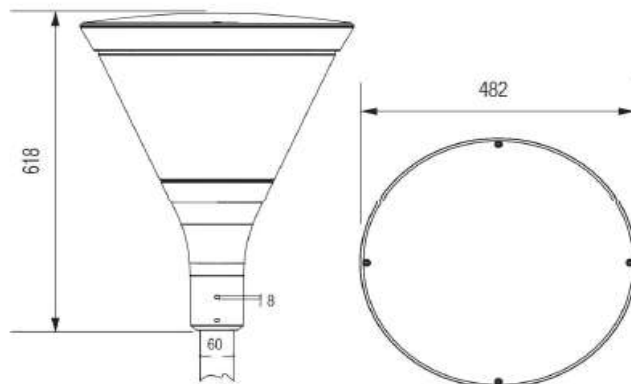

PHOTOMETRIC DISTRIBUTIONS

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.