

C € IP 67

4251

Neon Flex

TECHNICAL DATA Mounting: Surface

> **LED Type:** Neon Flex Protection: IP67

Operation temperature: 0-50

ELECTRICAL DATA Power: 12W

> Type of Equipment: Power factor:

OPTICAL DATA Beam Angle: 120


Way of lighting: Direct

CCT: 2700K, 3000K, 4000K, 5000K, 6000

CRI: 90<

GENERAL DATA Warranty: 3 Years

Application: Office, Residential, Hospitals, Schools

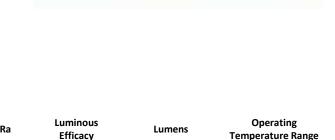


	Another options on request					
Code	Operating Voltage	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
4251.7112.1345	24V	12	90	33	400	0 - 50

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating. The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.




ORDER DETAILS

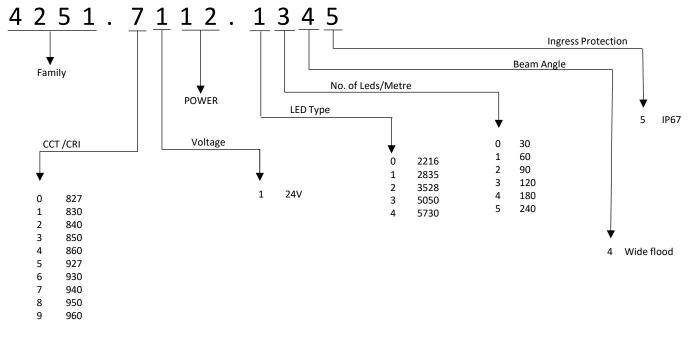

Code Dimension (mm)

4251.7112.1345

L 5000 X W 12



Accessories:











Attention:









2. Installation of Neon Simultaneously install the neon from both ends



3. Installation of Neon Should use tools to assist when remove the neon

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating. The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.