

## **C € IP 20**

## 9500

## **Power Supply**

TECHNICAL DATA Body: Metal

Colour:
Protection: IP20

Operation temperature: -10<sup>0</sup>~+35<sup>0</sup>

Operation temperature: -10°~+35°

Storage temperature: -10°~+80°

**ELECTRICAL DATA Power:** 60 - 300W

Type of Equipment: ED, Dimmable on request

Efficiency: > = 89%

Input Voltage: AC 110-250V / 50-60Hz EMC: Compliance to EN55032(CISPR32)



GENERAL DATA

**Application:** For Constant Voltage Luminaires

	Type of				Operating Temperature
Code	Equipment	Power	Input	Output	Range
9500.0060.0101	ED	60	AC 110-250V	24V DC 2.5A	-10 <sup>0</sup> ~ +35 <sup>0</sup>
9500.0100.0101	ED	100	AC 110-250V	24V DC 4.2A	-10 <sup>0</sup> ~ +35 <sup>0</sup>
9500.0150.0101	ED	150	AC 110-250V	24V DC 6.2A	-10 <sup>0</sup> ~ +35 <sup>0</sup>
9500.0200.0101	ED	200	AC 110-250V	24V DC 8.3A	-10 <sup>0</sup> ~ +35 <sup>0</sup>
9500.0300.0101	ED	300	AC 110-250V	24V DC 12.5A	-10 <sup>0</sup> ~ +35 <sup>0</sup>

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.



ORDER DETAILS

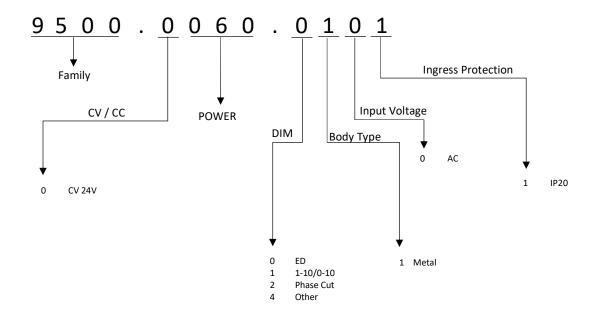

Code	Dimension (mm)	
9500.0060.0101	L 142 X W 35 X H 23	
9500.0100.0101	L 138 X W 50 X H 23	
9500.0150.0101	L 138 X W 50 X H 23	
9500.0200.0101	L 178 X W 50 X H 23	
9500.0300.0101	L 187 X W 60 X H 28	

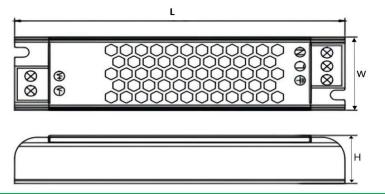

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.