

C € IP 44

2500

Panel light fixtures

TECHNICAL DATA Mounting: Recessed Mounted

Body: CRCA Sheet steel

Colour: White Protection: IP44

Operation temperature: 0 $^{\sim}$ +35

ELECTRICAL DATA Power:36W

Type of Equipment: ED (Dali ,1-10V on request)

Power factor: 0.90<

Input Voltage: AC 220-240V 50/60Hz.

OPTICAL DATA Way of lighting: Direct

Diffuser: Opal

CCT: 3000K, 4000K, 6500K

CRI: 80<

GENERAL DATA Application: Offices, Residential, Shops & School




Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature range
2500.2036.0100	ED	36	80	112	4000	0 ~+35

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating. The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.




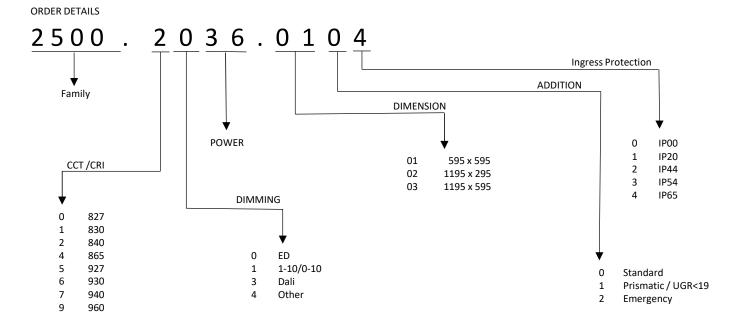

Code	Dimension (mm)			
2500.2036.0100	L 595 W 595 H33			
		595	─ ┩	H ³³

PHOTOMETRIC DISTRIBUTIONS





Dimensions are in mm

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating. The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.