

C € IP 20

1040

Recessed Down Light

TECHNICAL DATA Mounting: Recessed

Body: Diecast Aluminium

Colour: White Protection: IP20

Operation temperature: 0-35

ELECTRICAL DATA Power

Type of Equipment: ED, Dimmable on request

Power factor: 0.9<

Input Voltage: AC 220-240V 50/60Hz

OPTICAL DATA Beam Angle: 24

Way of lighting: Direct

Diffuser: Acrylic

CCT: 3000K, 4000K, 5000K

CRI: 80<

GENERAL DATA Warranty: 5Years

Application : Office, Residential, Hospitals



Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
1040.XX10.0621	ED	10	80/90	90	900	0 - 35
1040.XX14.0621	ED	14	80/90	90	1260	0 - 35
1040.XX18.0621	ED	18	80/90	90	1620	0 - 35
1040.XX28.0621	ED	28	80/90	90	2520	0 - 35

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.



ORDER DETAILS

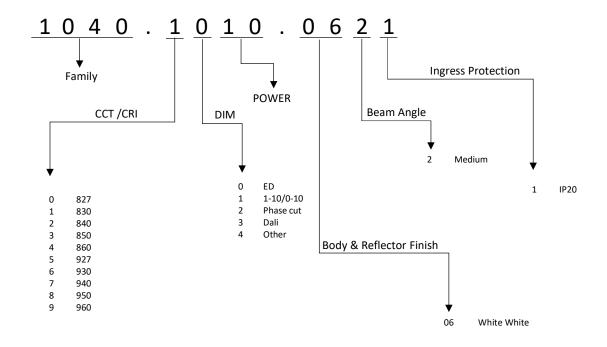

Code	Dimension (mm)	Cutout (mm)	
1040.XX10.0621	D 87 X H 40	75	
1040.XX14.0621	D 106 X H 45	95	
1040.XX18.0621	D 135 X H 55	120	
1040.XX28.0621	D 175 X H 65	160	





Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

 $The operating temperature \, ranges \, apply \, only \, to \, luminaires \, used \, in \, the \, outdoor \, environment.$

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.