

C€ IP 67

9500

Power Supply

TECHNICAL DATA

Body: Metal
Colour:
Protection: IP67

Operation temperature: -10^{0} ~+ 50^{0} Storage temperature: -10^{0} ~+ 80^{0}

ELECTRICAL DATA

Power: 60 - 300W

Type of Equipment: ED, Dimmable on request

Efficiency: > = 89%

Input Voltage: AC 110-250V / 50-60Hz

EMC: Compliance to EN55032(CISPR32)



GENERAL DATA

Application : For Constant Voltage Luminaires

		Type of				Operating Temperature
Code		Equipment	Power	Input	Output	Range
9500.0060.010	5	ED	60	AC 110-250V	24V DC 2.5A	-10 ⁰ ~ +50 ⁰
9500.0100.010	5	ED	100	AC 110-250V	24V DC 4.2A	-10 ⁰ ~ +50 ⁰
9500.0150.010	5	ED	150	AC 110-250V	24V DC 6.25A	-10 ⁰ ~ +50 ⁰
9500.0200.010	5	ED	200	AC 110-250V	24V DC 8.3A	-10 ⁰ ~ +50 ⁰
9500.0300.010	5	ED	300	AC 110-250V	24V DC 12.5A	-10 ⁰ ~ +50 ⁰

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.



ORDER DETAILS

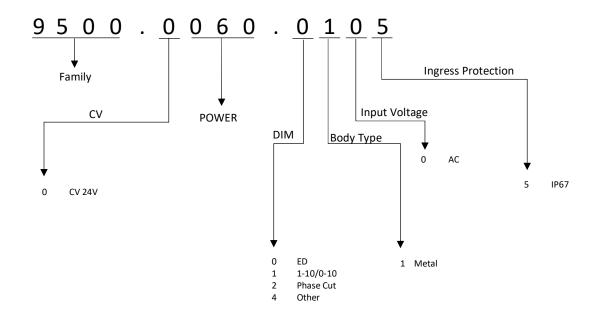

Code	Dimension (mm)				
9500.0060.0105	L 150 X W 38 X H 21				
9500.0100.0105	L 195 X W 53 X H 19				
9500.0150.0105	L 215 X W 60 X H 24				
9500.0200.0105	L 215 X W 60 X H 24				
9500.0300.0105	L 220 X W 78 X H 32				
			w		
			Н		

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.