

CE IP 20

2250

Suspended Linear Light

TECHNICAL DATA

Mounting: Surface Mounted
Body: Die Cast Aluminium
Colour: White/Black/Silver
Protection: IP20
Operation temperature: 0 ~+35

ELECTRICAL DATA


Power:
Type of Equipment: ED
Power factor: 0.90<

OPTICAL DATA

Way of lighting: Direct
Diffuser: Poly carbonate
CCT: 3000K, 4000K, 5000K
CRI: 80<

GENERAL DATA

Application : Offices, Residential, Shops, Hospitals

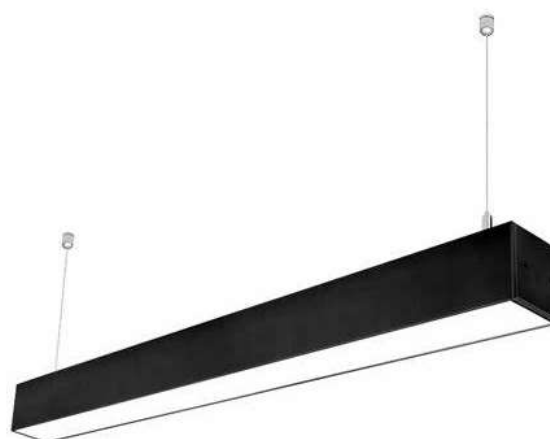

Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature range
2250.1030.0301	ED	30	80	90	2700	0 ~+35
2250.2030.0301	ED	30	80	90	2700	0 ~+35
2250.1060.0601	ED	60	80	90	5400	0 ~+35
2250.2060.0601	ED	60	80	90	5400	0 ~+35

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS

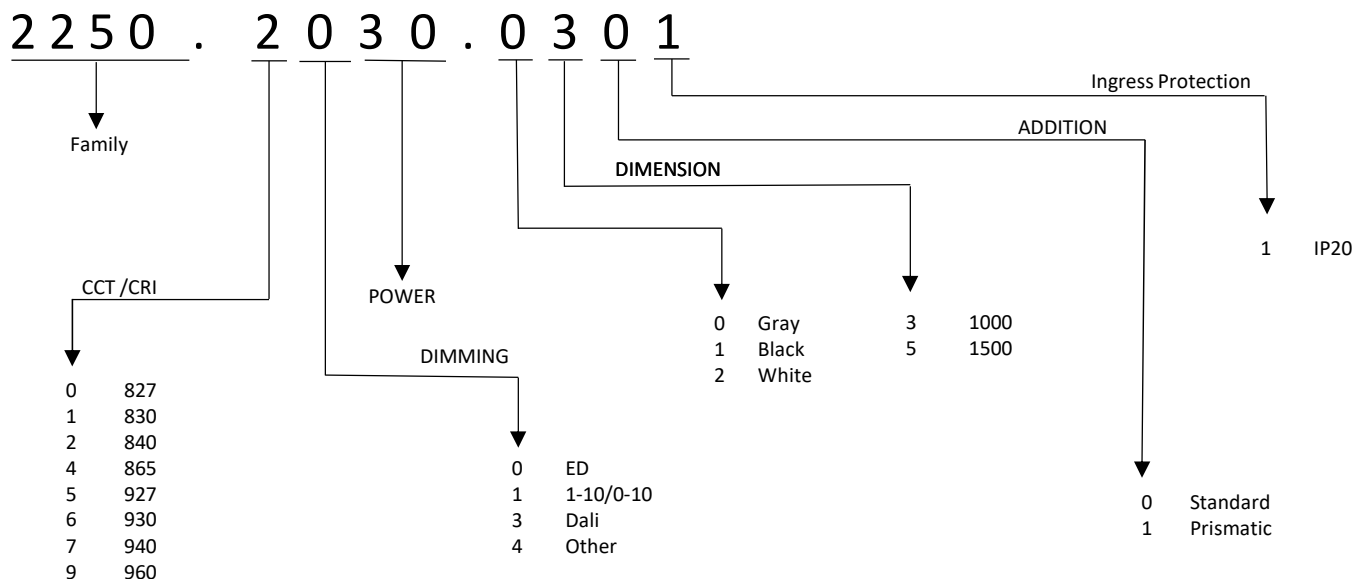

Code	Dimension			
2250.1030.0301	L 1000	W 50	H 70	
2250.2030.0301	L 1000	W 50	H 70	
2250.1060.0601	L 2000	W 50	H 70	
2250.2060.0601	L 2000	W 50	H 70	

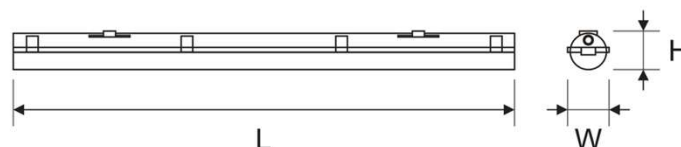

Note: We offer customized lengths on request

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.