

CE IP 65

1052

## Recessed Down Light

### TECHNICAL DATA

**Mounting:** Recessed  
**Body:** Diecast Aluminium  
**Colour:** White, Black  
**Protection:** IP65  
**Operation temperature:** 0~35°

### ELECTRICAL DATA

**Power:** 7-18W  
**Type of Equipment:** ED, Dimmable on request  
**Power factor:** 0.9<  
**Input Voltage:** AC 220-240V 50/60Hz

### OPTICAL DATA

**Beam Angle:** 15 / 24 / 36°  
**Way of lighting:** Direct  
**Diffuser:** Glass  
**CCT:** 3000K, 4000K, 5000K  
**CRI:** 80<

### GENERAL DATA

**Warranty:** 5Years  
**Application :** Office, Residential, Hospitals



Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
1052.XX07.XXX4	ED/DIM	7	80/90	100	700	0 - 35
1052.XX10.XXX4	ED/DIM	10	80/90	100	1000	0 - 35
1052.XX12.XXX4	ED/DIM	12	80/90	100	1200	0 - 35
1052.XX15.XXX4	ED/DIM	15	80/90	100	1500	0 - 35
1052.XX18.XXX4	ED/DIM	18	80/90	100	1800	0 - 35

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.

## ORDER DETAILS

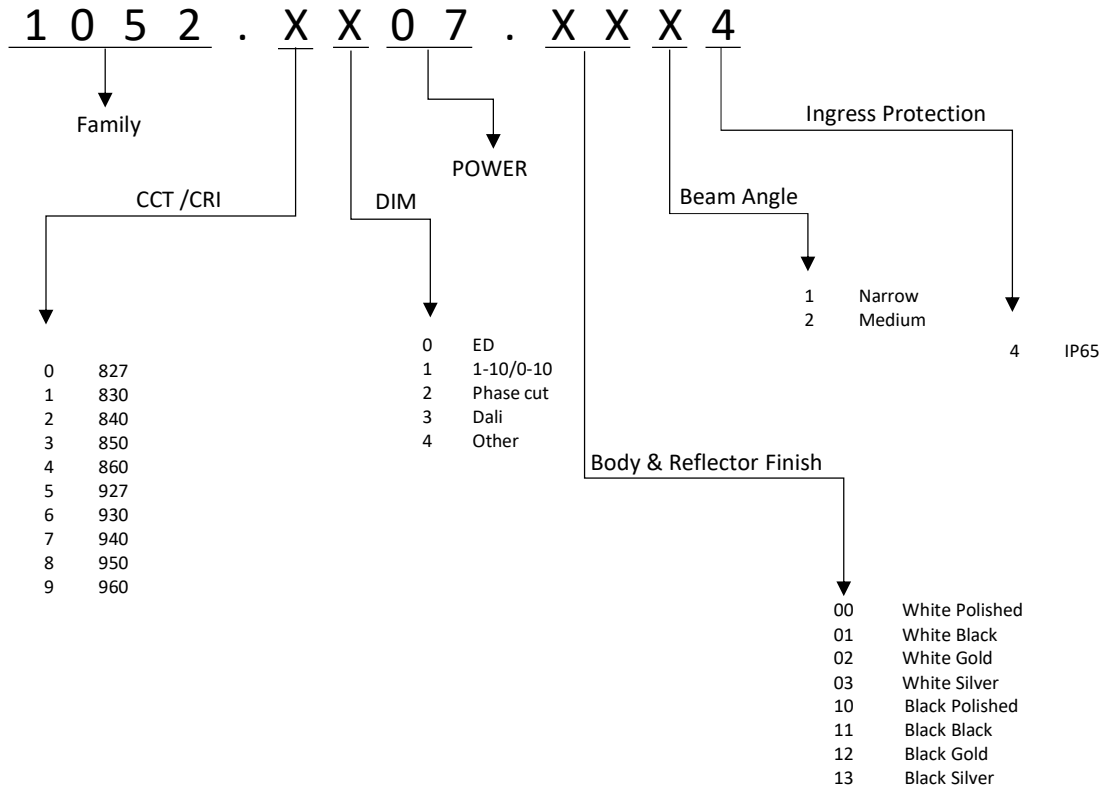

Code	Dimension (mm)	Cutout (mm)
1052.XX07.XXX4	D 71 X H 50	60
1052.XX10.XXX4	D 82 X H 58.5	75
1052.XX12.XXX4	D 82 X H 58.5	75
1052.XX15.XXX4	D 101 X H 66	90
1052.XX18.XXX4	D 101 X H 66	90

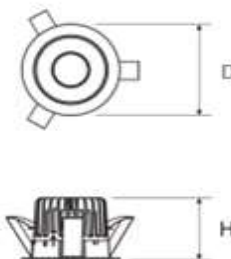

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.  
The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.  
Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.