

CE IP 44

1037

## Recessed Down Light

### TECHNICAL DATA

**Mounting:** Recessed  
**Body:** Diecast Aluminium  
**Colour:** White, Black  
**Protection:** IP44  
**Operation temperature:** 0-35

### ELECTRICAL DATA

**Power:** 10-50W  
**Type of Equipment:** ED, Dimmable on request  
**Power factor:** 0.9<  
**Input Voltage:** AC 220-240V 50/60Hz

### OPTICAL DATA

**Beam Angle:** Wide Beam  
**Way of lighting:** Direct  
**Diffuser:** Acrylic  
**CCT:** 3000K, 4000K, 5000K  
**CRI:** 80<

### GENERAL DATA

**Warranty:** 5Years  
**Application :** Office, Residential, Hospitals



Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
1037.XX10.XX42	ED/DIM	10	80/90	100	900	0 - 35
1037.XX14.XX42	ED/DIM	14	80/90	100	1400	0 - 35
1037.XX18.XX42	ED/DIM	18	80/90	100	1800	0 - 35
1037.XX20.XX42	ED/DIM	20	80/90	100	2000	0 - 35
1037.XX25.XX42	ED/DIM	25	80/90	100	2500	0 - 35
1037.XX30.XX42	ED/DIM	30	80/90	100	3000	0 - 35
1037.XX45.XX42	ED/DIM	45	80/90	100	4500	0 - 35
1037.XX50.XX42	ED/DIM	50	80/90	100	5000	0 - 35

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.

## ORDER DETAILS

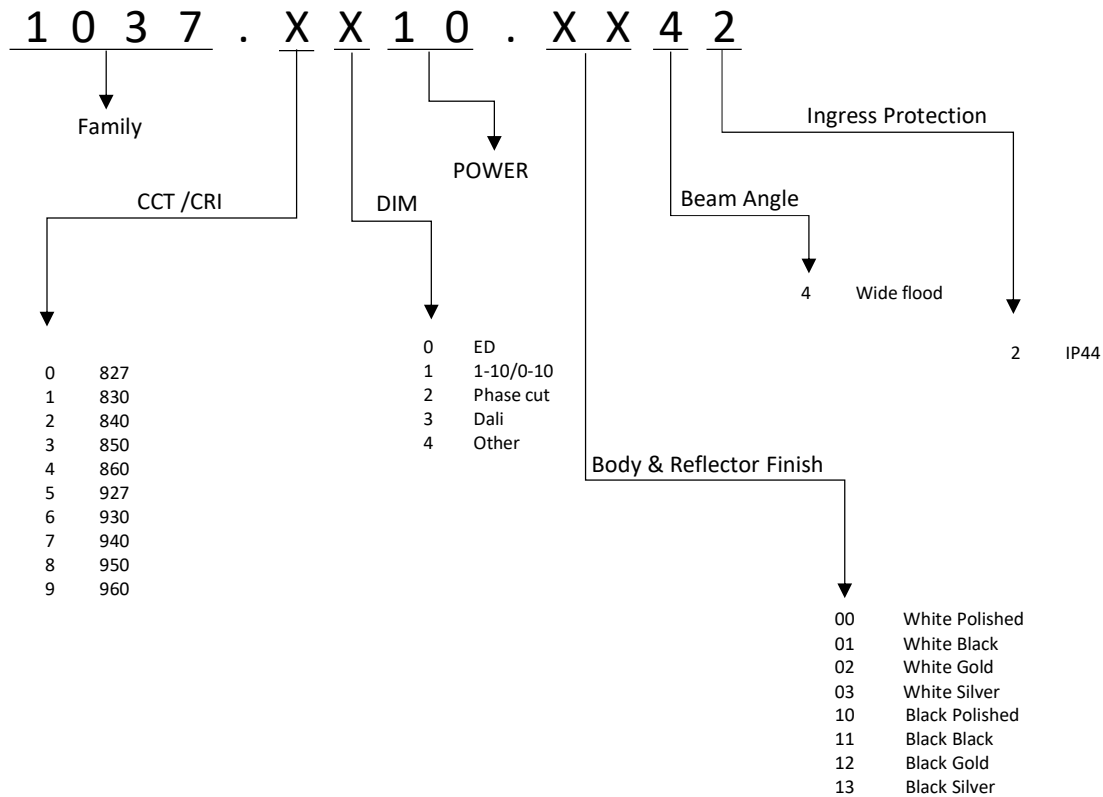

Code	Dimension (mm)	Cutout (mm)
1037.XX10.XX42	D 90 X H 56	75
1037.XX14.XX42	D 95 X H 60	80
1037.XX18.XX42	D 105 X H 64	95
1037.XX20.XX42	D 130 X H 72	120
1037.XX25.XX42	D 160 X H 82	145
1037.XX30.XX42	D 180 X H 90	160
1037.XX45.XX42	D 230 X H 100	200
1037.XX50.XX42	D 230 X H 100	200



Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.