

CE IP 65 IK 08

7500

Pole Top light fixtures

TECHNICAL DATA

Mounting: Pole Mounted
Body: Heavy Duty Diecast Aluminium
Colour: Grey, Black, other RAL colour on request
Protection: IP65
Operation temperature: -25 ~ +50

ELECTRICAL DATA

Power: 30W / 60W / 100W / 150W
Type of Equipment: ED, Dimmable on request
Power factor: 0.95<

OPTICAL DATA

Beam Angle: 90° x 90°, T2-S
Way of lighting: Direct
Diffuser: Tempered Glass
CCT: 3000K - 6500K
CRI: 70/80<

GENERAL DATA

Application : Parking, Parks, Gardens



Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
7500.XX30.XXX4	ED	30	70	100	3000	-25 ~ +50
7500.XX60.XXX4	ED	60	70	100	6000	-25 ~ +50
7500.X100.XXX4	ED	100	70	100	10000	-25 ~ +50
7500.X150.XXX4	ED	150	70	100	15000	-25 ~ +50

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.




Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.

ORDER DETAILS

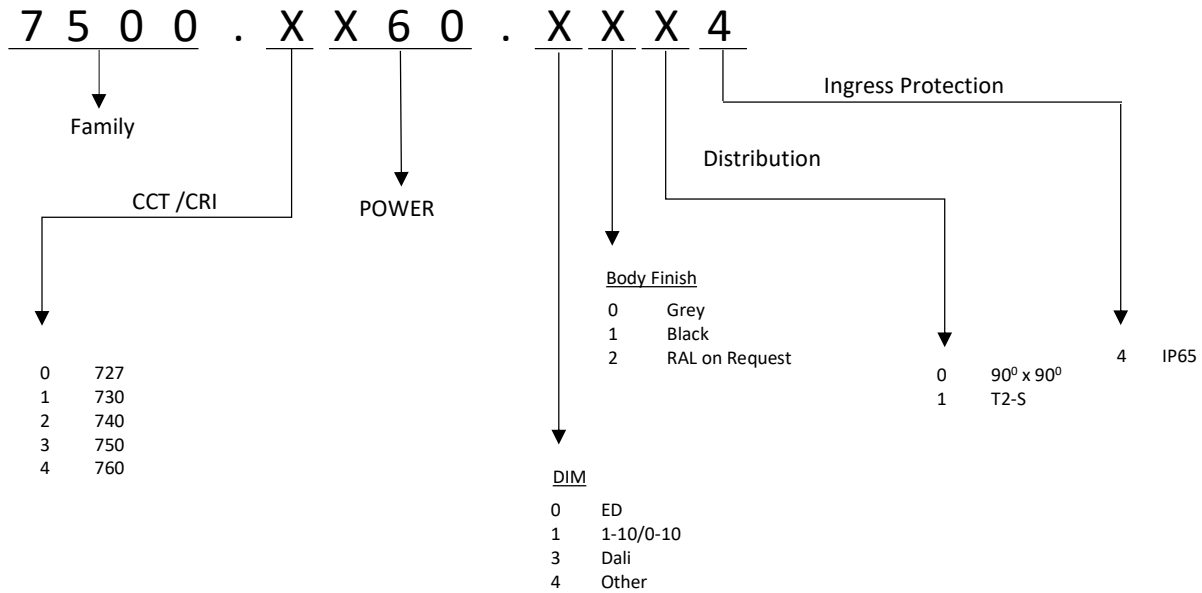

Code	Dimension (mm)	Mounting Dia (mm)
7500.XX30.XXX4	D 488 X H 618	60/76
7500.XX60.XXX4	D 488 X H 618	60/76
7500.X100.XXX4	D 488 X H 618	60/76
7500.X150.XXX4	D 488 X H 618	60/76

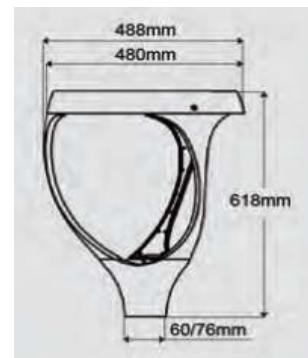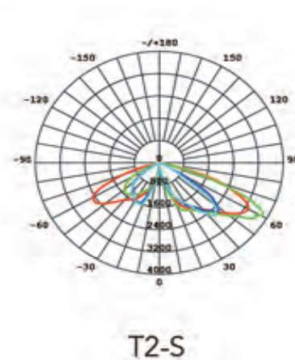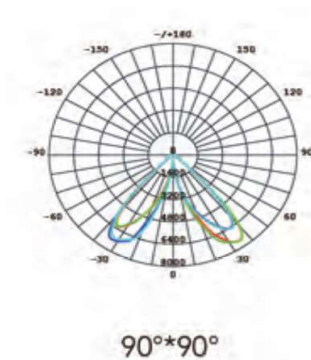

PHOTOMETRIC DISTRIBUTIONS

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.