

CE IP 65

3000

Weather Proof light fixtures

TECHNICAL DATA

Mounting: Surface Mounted

Body: Poly Carbonate

Colour: Grey

Protection: IP65

Operation temperature: -25 ~+50

ELECTRICAL DATA

Power:18W-48W

Type of Equipment: ED (Dali ,1-10V & MS on request)

Power factor: 0.90<

OPTICAL DATA

Way of lighting: Direct

Diffuser: Poly carbonate

CCT: 3000K, 4000K,6500K

CRI: 80<

GENERAL DATA

Application : Parking, Services



Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature range
3000.2018.0104	ED	18	80	100	1800	-25 ~+50
3000.2036.0204	ED	36	80	100	3600	-25 ~+50
3000.2048.0304	ED	48	80	100	4800	-25 ~+50

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.


ORDER DETAILS

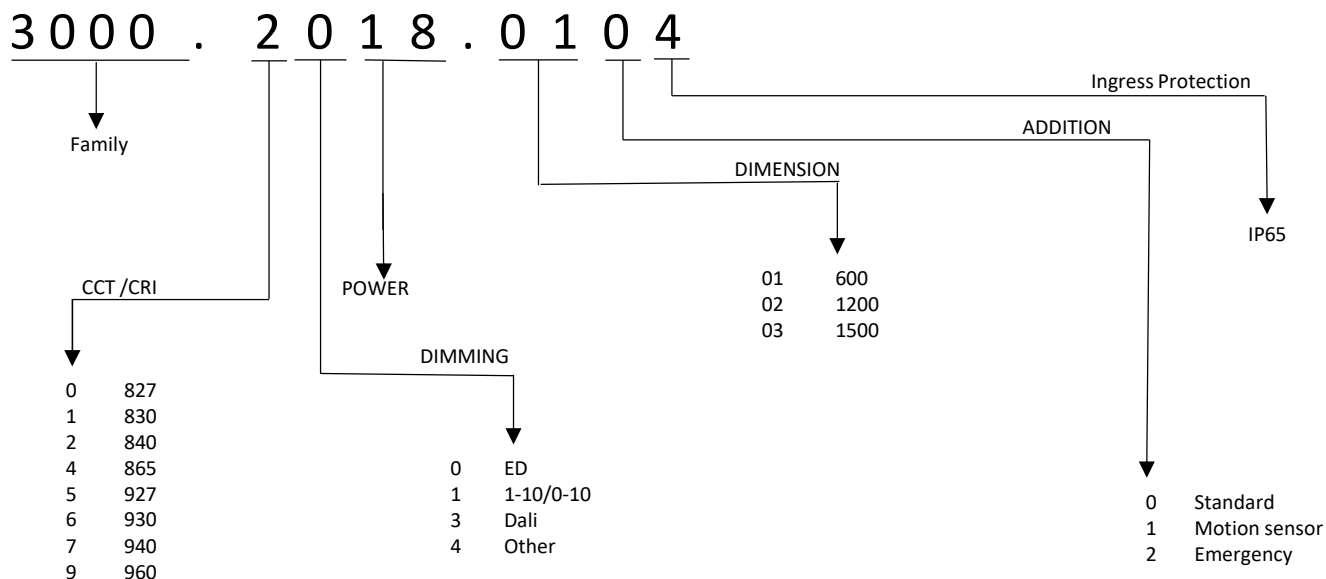

Code	Dimension		
3000.2018.0104	L 610	W 100	H75
3000.2036.0104	L 1210	W 100	H75
3000.2048.0104	L 1510	W 100	H75

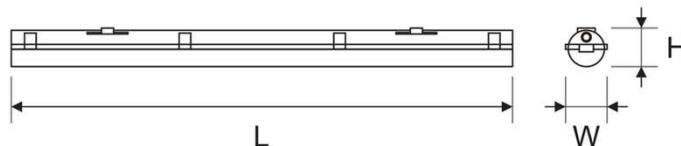

PHOTOMETRIC DISTRIBUTIONS

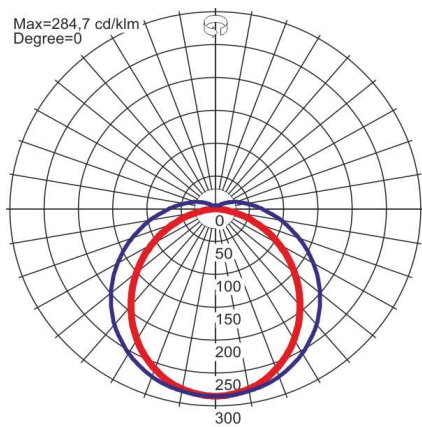

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

Led Waves Lighting reserves right to introduce any construction changes and improvements into the lighting.