

## **C**€ IP 44

## 1047

## Recessed Down Light

TECHNICAL DATA Mounting: Recessed

Body: Diecast Aluminium

Colour: White Protection: IP44

Operation temperature: 0-35

ELECTRICAL DATA Power: 7W-30W

Type of Equipment: ED, Dimmable on request

Power factor: 0.9<

Input Voltage: AC 220-240V 50/60Hz

OPTICAL DATA Beam Angle: 50

Way of lighting: Direct

Diffuser: Acrylic

**CCT:** 3000K, 4000K, 5000K

**CRI:** 90<

GENERAL DATA Warranty: 5Years

**Application :** Office, Residential, Hospitals



| Code           | Type of Equipment | Power | CRI / Ra | Luminous<br>Efficacy | Lumens | Operating Temperature Range |
|----------------|-------------------|-------|----------|----------------------|--------|-----------------------------|
| 1047.XX07.0032 | ED                | 7     | 90       | 90                   | 630    | 0 - 35                      |
| 1047.XX12.0032 | ED                | 12    | 90       | 90                   | 1080   | 0 - 35                      |
| 1047.XX18.0032 | ED                | 18    | 90       | 90                   | 1620   | 0 - 35                      |
| 1047.XX23.0032 | ED                | 23    | 90       | 90                   | 2070   | 0 - 35                      |
| 1047.XX30.0032 | ED                | 30    | 90       | 90                   | 2700   | 0 - 35                      |
|                |                   |       |          |                      |        |                             |
|                |                   |       |          |                      |        |                             |
|                |                   |       |          |                      |        |                             |

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.


The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.


Colour temperature tolerance +/- 5%.



ORDER DETAILS

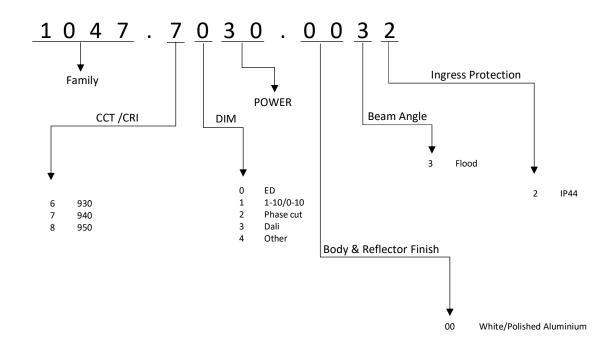

| Code           | Dimension (mm) | Cutout (mm) |  |
|----------------|----------------|-------------|--|
| 1047.XX07.0032 | D 87 X H 33    | 80          |  |
| 1047.XX12.0032 | D 115 X H 42   | 105         |  |
| 1047.XX18.0032 | D 142 X H 50   | 130         |  |
| 1047.XX23.0032 | D 169 X H 58   | 158         |  |
| 1047.XX30.0032 | D 217 X H 70   | 200         |  |





Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

 $The operating temperature \, ranges \, apply \, only \, to \, luminaires \, used \, in \, the \, outdoor \, environment.$ 

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.