

## CE IP 20

## 1000

### Recessed Down Light

#### TECHNICAL DATA

**Mounting:** Recessed  
**Body:** Diecast Aluminium  
**Colour:** White, Black  
**Protection:** IP20  
**Operation temperature:** 0-35

#### ELECTRICAL DATA

**Power:** 10  
**Type of Equipment:** ED, Dimmable on request  
**Power factor:** 0.9<  
**Input Voltage:** AC 220-240V 50/60Hz

#### OPTICAL DATA

**Beam Angle:** 15 / 24 / 36  
**Way of lighting:** Direct  
**Diffuser:** Acrylic  
**CCT:** 3000K, 4000K, 5000K  
**CRI:** 80<

#### GENERAL DATA

**Warranty:** 5Years  
**Application :** Office, Residential, Hospitals



Code	Type of Equipment	Power	CRI / Ra	Luminous Efficacy	Lumens	Operating Temperature Range
1000.XX10.XXXX	ED/DIM	10	80/90	90	900	0 - 35

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The LED WAVES Lighting reserves right to introduce any construction changes and improvements into the lighting.

## ORDER DETAILS

1 0 0 0 . X X 1 0 . X X 1 X

Family

CCT /CRI

0	827
1	830
2	840
3	850
4	860
5	927
6	930
7	940
8	950
9	960

DIM

0	ED
1	1-10/0-10
2	Phase cut
3	Dali
4	Other

POWER

Body & Reflector Finish

00	White Polished
01	White Black
02	White Gold
03	White Silver
10	Black Polished
11	Black Black
12	Black Gold
13	Black Silver

Beam Angle

Ingress Protection

0	IP00
1	IP20
2	IP44
3	IP54
4	IP65
5	IP67
6	IP68



0	Very Narrow
1	Narrow
2	Medium
3	Flood
4	Wide flood

Code	Dimension (mm)	Cutout
------	----------------	--------

1000.XX10.XXXX

D 85 X H 52

75

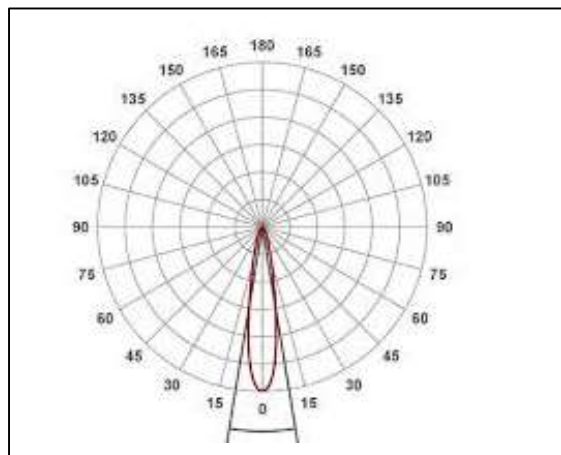

## PHOTOMETRIC DISTRIBUTIONS

Please note that the standard luminaire is not intended for use in an environment with a high degree of salinity. If it is required to adapt the luminaire to work in such an environment, please contact our Sales Department to confirm the possibility of using an additional protective coating.

The operating temperature ranges apply only to luminaires used in the outdoor environment.

Power tolerance +/- 5%.

Colour temperature tolerance +/- 5%.

The LED WAVES Lighting reserves right to introduce any construction changes and improvements into the lighting.